

NEW
@2014




Valve

Company: PMG Polmetasa, S.A.U.

Information: Base or bottom valve for twin-tube shock absorber applications. Tight flatness and relative height tolerances plus a multilevel geometry are the main challenges

Material: Fe+ 0,3%C +2% Cu
Density: 6,3-6,5 gr/cc
Hardness: > HRB 70

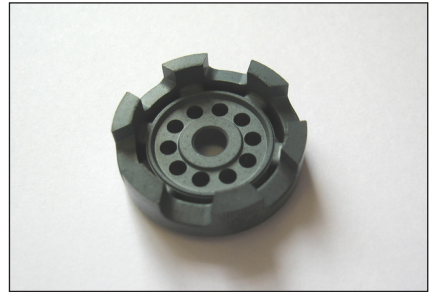

Material: Fe+ 0,5%C +2% Cu
Density: 6,3-6,5 gr/cc
Hardness: > HRB 70

